

Lace Up Cable Grips

slingco®

USAGE INSTRUCTIONS




1 Start the lacing from the 'eye' end or anchoring end of the cable grip.



2 Thread the lace through the first two loops of the split and pull through until the laces are centered at this point.




3 Don't pull the lace too tight at this stage. Leave a space between adjoining loops roughly equal to the width of one diamond of the mesh.

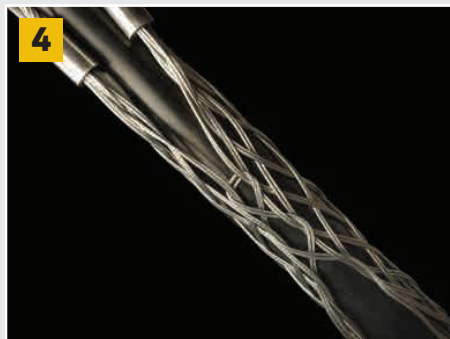


4 Continue down the length of the cable grip. Try to maintain equal tension and equal spacing throughout as this leads to a more stable and equal grip.




5 As you continue down the length, pull the open sides of the grip as wide apart as required.

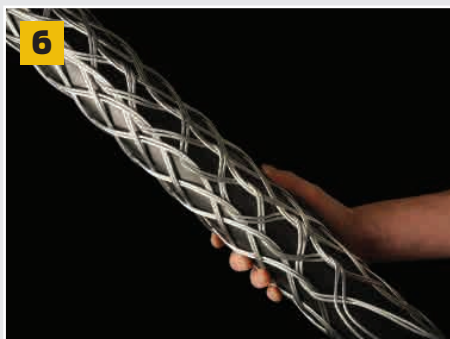

6 Try to achieve an even and neat lace-up as this assists with the strength of the grip when pulling.

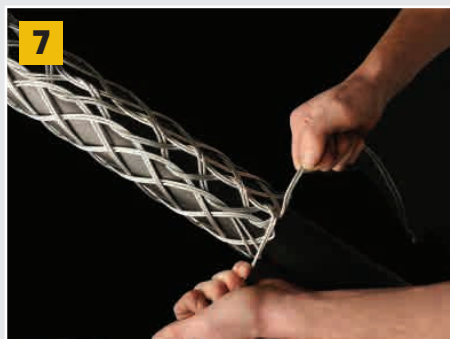

7 Finally, tie the ends of the lace once or twice round the end of the cable grip twisting the ends together securely. Excess lace can be cut off.

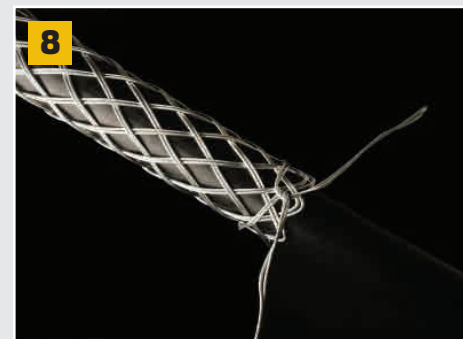

8 Add any additional support as required – banding is recommended. The Slingco cable grip is now ready to use.

www.cablegrip.com • sales@cablegrip.com

Serving North and South America

888 685 9478

Slingco America, Inc., 130 Celtic Blvd, Tyrone,
Georgia 30290, USA • Fax: 888 728 4047

Serving the UK and rest of the world

+44 [0]1706 855558

Slingco Limited, Station Road, Facit, Whitworth,
Lancashire, OL12 8LJ, UK • Fax: +44 (0)1706 855558