


LU TYPE - LACE UP CABLE GRIPS



KEY FEATURES

- ✓ Available in galvanised steel or stainless steel
- ✓ Suitable for underground installations
- ✓ Suitable for restricted cable access

Ideal for pulling light to medium loads; the L-type is fitted to the cable being pulled by stitching it together, like a football. Mainly used where a 'typical' cable grip can't be fitted over a connector at the end of a cable. For use in pulling when the end is not accessible. The L Type is wrapped around the cable, then closed with the wire lace provided. See Grip Installation Instructions under Literature Tab

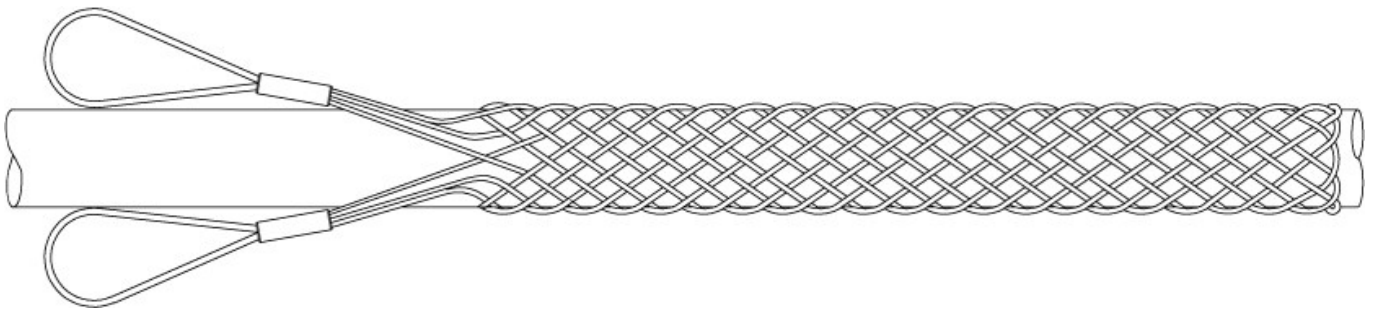

GET IN TOUCH

01706 855 558

sales@slingco.com

LU TYPE - LACE UP CABLE GRIPS

Lace Up Standard Grip - Galvanised

Slingco Part No.	Range (mm)	Range (in)	Lattice Weave	Lattice Length (mm)	Lattice Length (in)	Overall Length (mm)	Overall Length (in)	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS1157	6 - 13	0.25 - 0.50	Single	230	8	305	17	760	1,680
ZCS0872	13 - 19	0.50 - 0.75	Single	355	17	430	22	1,015	2,240
ZCS0871	19 - 25	0.75 - 1.00	Single	405	14.5	510	19	2,540	5,600
ZCS0328	25 - 38	1.00 - 1.50	Single	455	15	610	22	2,722	6,000
ZCS0329	38 - 50	1.50 - 2.00	Double	535	27	735	36	5,080	11,200
ZCS0330	50 - 63	2.00 - 2.50	Double	610	26	865	36	5,080	11,200
ZCS0331	63 - 89	2.50 - 3.50	Double	685	22	990	31	6,095	13,440
ZCS0853	89 - 115	3.50 - 4.50	Double	685	27	990	39	7,110	15,680
ZCS1109	115 - 140	4.50 - 5.50	Double	685	27	990	39	7,110	15,680
ZCS4463	120 - 150	4.72 - 5.90	Triple	1,500	59	2,600	102	14,700	32,928
ZCS3584	135 - 160	5.31 - 6.30	Double	1,000	39	1,600	63	17,000	38,080
ZCS3585	161 - 190	6.33 - 7.48	Double	1,500	59	2,100	83	17,000	38,080
ZCS3586	191 - 220	7.51 - 8.66	Double	1,500	59	2,100	83	17,000	38,080
ZCS3587	200 - 250	8.70 - 9.84	Double	2,280	59	2,732	83	32,000	38,080
ZCS3588	221 - 250	9.88 - 11.81	Double	1,500	79	2,100	106	17,000	38,080
	251 - 300			2,000		2,700		17,000	



GET IN TOUCH

01706 855 558

sales@slingco.com

LU TYPE - LACE UP CABLE GRIPS

Lace Up Standard Grip - 316 Stainless Steel

Slingco Part No.	Range (mm)	Range (in)	Lattice Weave	Lattice Length (mm)	Lattice Length (in)	Overall Length (mm)	Overall Length (in)	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS1983	6 - 13	0.25 - 0.50	Single	230	9	305	12	610	1,344
ZCS1796	13 - 19	0.50 - 0.75	Single	355	14	430	17	810	1,792
ZCS1789	19 - 25	0.75 - 1.00	Single	405	16	510	20	2,030	4,480
ZCS1797	25 - 38	1.00 - 1.50	Single	455	18	610	24	2,845	6,272
ZCS1984	38 - 50	1.50 - 2.00	Double	535	21	735	29	4,065	8,960
ZCS2466	50 - 63	2.00 - 2.50	Double	610	24	865	34	4,065	8,960
ZCS0816	63 - 89	2.50 - 3.50	Double	685	27	990	39	4,875	10,752
ZCS5094	69 - 87	2.75 - 3.44	Multiple	1,362	55	2,041	81	18,144	40,000
ZCS1356	89 - 115	3.50 - 4.50	Double	685	27	990	39	5,690	12,544
ZCS2832	89 - 115	3.50 - 4.50	Triple	685	27	990	39	6,300	14,012
ZCS1355	115 - 140	4.50 - 5.50	Double	685	27	990	39	5,690	12,544
ZCS2833	115 - 140	4.50 - 5.50	Triple	685	27	990	39	7,315	16,128

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



GET IN TOUCH

01706 855 558

sales@slingco.com