


OS TYPE – OFFSET EYE CABLE GRIPS



KEY FEATURES

- ✓ Available in galvanised steel or stainless steel
- ✓ Suitable for underground installations
- ✓ Fits easily onto electrical cables

Similar to the SE Type single eye cable grip, but for when offset positioning is required. Excellent for pulling slack out of lines that have been pulled. May also be used for removing underground cables when end of cable is available.

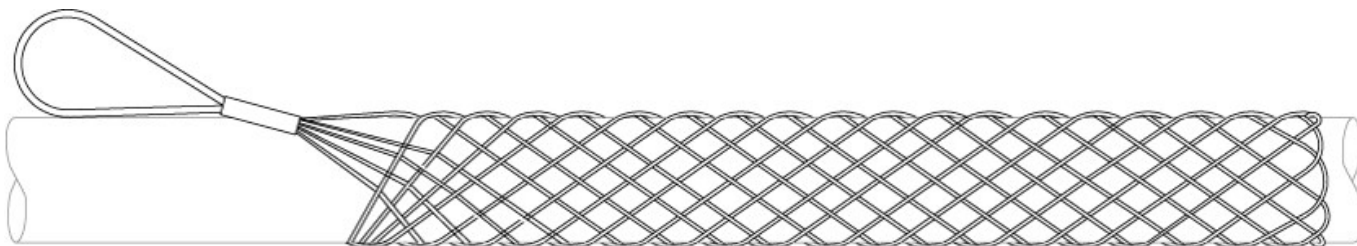

Offset Eye Standard Grip - Galvanised

| Slingco Part No. | Range (mm) | Range (in) | Lattice Weave | Lattice Length (mm) | Lattice Length (in) | Overall Length (mm) | Overall Length (in) | Approx. Break Load (kg) | Approx. Break Load (lb) |
|------------------|------------|-------------|---------------|---------------------|---------------------|---------------------|---------------------|-------------------------|-------------------------|
| ZCS1860 | 6 - 13 | 0.25 - 0.50 | Single | 230 | 9 | 305 | 12 | 760 | 1,680 |
| ZCS1861 | 13 - 19 | 0.50 - 0.75 | Single | 355 | 14 | 430 | 17 | 1,015 | 2,240 |
| ZCS1862 | 19 - 25 | 0.75 - 1.00 | Single | 405 | 16 | 510 | 20 | 2,540 | 5,600 |
| ZCS1863 | 25 - 38 | 1.00 - 1.50 | Single | 455 | 18 | 610 | 24 | 3,555 | 7,837 |
| ZCS1864 | 38 - 50 | 1.50 - 2.00 | Double | 535 | 21 | 735 | 29 | 5,080 | 11,200 |
| ZCS1865 | 50 - 63 | 2.00 - 2.50 | Double | 610 | 24 | 865 | 34 | 5,080 | 11,200 |
| ZCS1866 | 63 - 89 | 2.50 - 3.50 | Double | 685 | 27 | 990 | 39 | 6,095 | 13,440 |
| ZCS1867 | 89 - 115 | 3.50 - 4.50 | Double | 685 | 27 | 990 | 39 | 7,110 | 15,680 |
| ZCS1974 | 115 - 140 | 4.50 - 5.50 | Double | 685 | 27 | 990 | 39 | 7,110 | 15,680 |



GET IN TOUCH

01706 855 558

sales@slingco.com

OS TYPE – OFFSET EYE CABLE GRIPS

Offset Eye Standard Grip - 316 Stainless Steel

| Slingco Part No. | Range (mm) | Range (in) | Lattice Weave | Lattice Length (mm) | Lattice Length (in) | Overall Length (mm) | Overall Length (in) | Approx. Break Load (kg) | Approx. Break Load (lb) |
|------------------|------------|-------------|---------------|---------------------|---------------------|---------------------|---------------------|-------------------------|-------------------------|
| ZCS1986 | 6 - 13 | 0.25 - 0.50 | Single | 230 | 9 | 305 | 12 | 610 | 1,344 |
| ZCS1987 | 13 - 19 | 0.50 - 0.75 | Single | 355 | 14 | 430 | 17 | 810 | 1,792 |
| ZCS1988 | 19 - 25 | 0.75 - 1.00 | Single | 405 | 16 | 510 | 20 | 2,030 | 4,480 |
| ZCS1989 | 25 - 38 | 1.00 - 1.50 | Single | 450 | 17.75 | 700 | 27.50 | 2,845 | 6,272 |
| ZCS1990 | 38 - 50 | 1.50 - 2.00 | Double | 535 | 21 | 735 | 29 | 4,065 | 8,960 |
| ZCS1991 | 50 - 63 | 2.00 - 2.50 | Double | 610 | 24 | 865 | 34 | 4,065 | 8,960 |
| ZCS1992 | 63 - 89 | 2.50 - 3.50 | Double | 685 | 27 | 990 | 39 | 4,875 | 10,752 |
| ZCS1993 | 89 - 115 | 3.50 - 4.50 | Double | 685 | 27 | 990 | 39 | 5,690 | 12,544 |
| ZCS1994 | 115 - 140 | 4.50 - 5.50 | Double | 685 | 27 | 990 | 39 | 5,690 | 12,544 |
| ZCS4069 | 140 - 180 | 8.0 - 9.0 | Double | 596 | 59 | 976 | 74 | 2,041 | 20,000 |
| | 203 - 229 | | | 1,500 | | 1,880 | | 8,928 | |

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-10%. Please contact us if you have any questions.

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



GET IN TOUCH

01706 855 558

sales@slingco.com